


# MDE Series




## FEATURES

- 
- 
- $^{\circ}\text{C}$  maximum total temperature operation
- 
- Ultra low buzz noise due to molding construction
- 
- Operating temperature range - 55  $^{\circ}\text{C}$  to + 125  $^{\circ}\text{C}$
- Quantity: 2000pcs

## APPLICATION

- Laptops and PCs
- 
- Base stations
- DC/DC converters
- Battery powered devices
- 

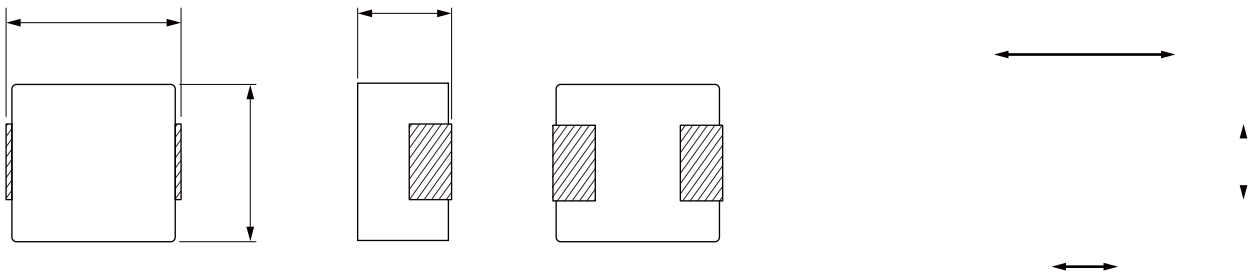

MDE0530-R10M	0.10	$\pm 20\%$	3.00	30.0	25.0
MDE0530-R20M	0.20	$\pm 20\%$	3.90	20.0	14.0
MDE0530-R33M	0.33	$\pm 20\%$	5.50	18.0	14.0
MDE0530-R47M	0.47	$\pm 20\%$	8.50	15.0	11.0
MDE0530-R68M	0.68	$\pm 20\%$	12.0	11.5	9.00
MDE0530-1R0M	1.00	$\pm 20\%$	14.0	10.0	8.50
MDE0530-1R2M	1.20	$\pm 20\%$	16.0	9.50	8.50
MDE0530-1R5M	1.50	$\pm 20\%$	25.0	9.00	8.20
MDE0530-2R2M	2.20	$\pm 20\%$	29.0	7.00	7.00
MDE0530-3R3M	3.30	$\pm 20\%$	38.0	6.00	5.50
MDE0530-4R7M	4.70	$\pm 20\%$	60.0	4.60	4.50
MDE0530-6R8M	6.80	$\pm 20\%$	90.0	3.60	3.50
MDE0530-100M	10.0	$\pm 20\%$		3.50	3.20
MDE0530-220M	22.0	$\pm 20\%$		2.30	1.70



