



# SCM Series






## FEATURES

- 
- 
- 
- 
- 

°C

## APPLICATIONS

- 
- 
- 




Part No	Impedance @ 100 MHz	Tolerance	DC Resistance Max.	Rated Current Max.	Rated Volt	Withstand Volt	IR Min.
SCM1210HS-350-02	35	±25%	0.30	200	50	125	10
SCM1210HS-500-02	50	±25%	0.30	250	50	125	10
SCM1210HS-600-02	60	±25%	0.30	250	50	125	10
SCM1210HS-900-02	90	±25%	0.40	200	50	125	10
SCM1210HS-900-04	90	±25%	0.40	400	50	125	10





:


SCM1210HS 1.12±0.1 1.40±0.1 1.5±0.1 4.0±0.1 4.0±0.1 8.0±0.3 1.05±0.1 1.75±0.1 0.22±0.05

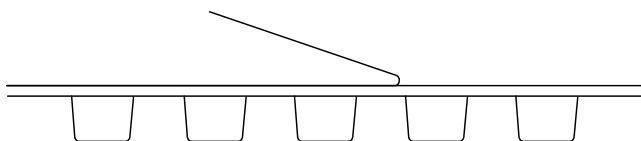


The peel force of top cover tape shall be between 0.15 to 0.78 N

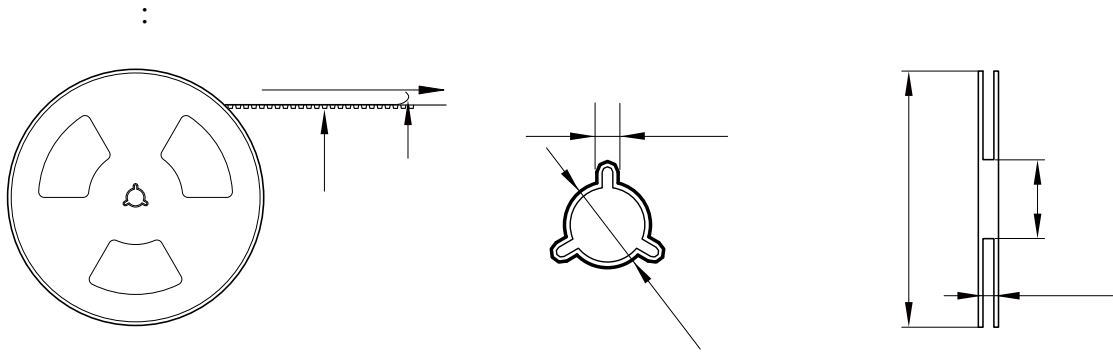

3000 Pcs/Reel



5 Reel /Inner box( 15K Pcs)



8 Inner box/Carton box(120K Pcs)

:

- 
- 
- 
- 
- 
- 
- 
- 
-